


0.25% Accuracy Pressure Transducers All Stainless Steel Construction


Model 5SE01313
0 to 5 thru 0 to 5000 PSI
Isolated 0-5 VDC Output

Model 5SE01313
Shown Smaller Than
Actual Size

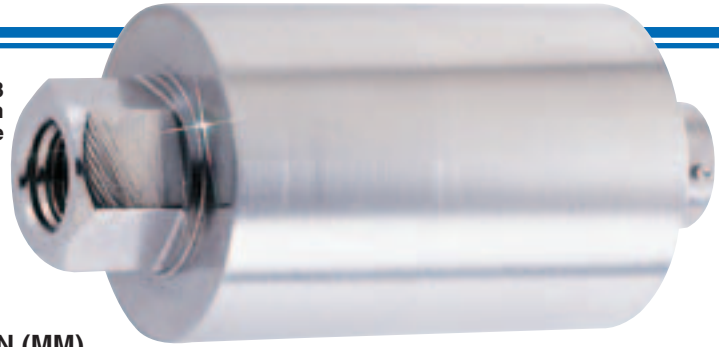

- ✓ High 0.25% Accuracy
- ✓ Rugged Thick Film Design
- ✓ Proven Performance in Extreme Applications
- ✓ All Stainless Steel Construction
- ✓ Isolated 0 to 5 VDC Output
- ✓ Internal Shunt Resistor for Easy System Function Verification
- ✓ High Overpressure Rating

DIMENSIONS: IN (MM)

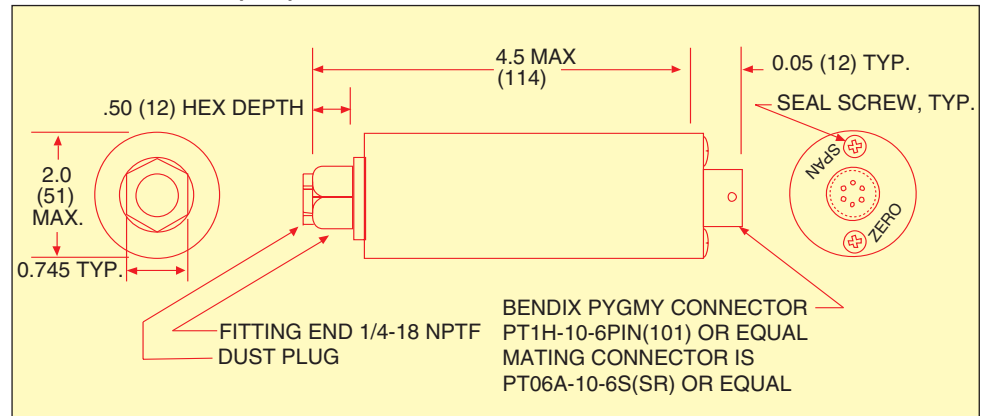

Connections	Connector end
A + 5 VDC	short pins E and
B - 5 VDC	F to simulate
C - 28 VDC	transducer
D + 28 VDC	pressure output
E Shunt	
F Shunt	

Custom Ranges Available!

To Order (Specify Part Number)

Part Number	Instrument Range	Units	Accuracy
5SE01313-1	0-5	PSIG	0.25%
5SE01313-2	0-10	PSIG	0.25%
5SE01313-3	0-20	PSIG	0.25%
5SE01313-4	0-50	PSIG	0.25%
5SE01313-5	0-100	PSIG	0.25%
5SE01313-6	0-150	PSIG	0.25%
5SE01313-7	0-200	PSIG	0.25%
5SE01313-8	0-500	PSIG	0.25%
5SE01313-9	0-1000	PSIG	0.25%
5SE01313-10	0-1500	PSIG	0.25%
5SE01313-11	0-2000	PSIG	0.25%
5SE01313-12	0-5000	PSIG	0.25%
5SE01313-13	0-50	IN.HgG	0.25%
5SE01313-14	0-100	IN.HgG	0.25%
5SE01313-15	0-200	IN.HgG	0.25%
5SE01313-16	0-500	IN.HgG	0.25%
5SE01313-17	0-1000	IN.HgG	0.25%
5SE01313-18	0-20	PSIA	0.25%
5SE01313-19	0-50	IN.H2OG	0.25%
5SE01313-20	0-300	PSIG	0.25%
5SE01313-21	0-600	IN.HgA	0.25%
5SE01313-22	0-50	IN.HgA	0.25%
5SE01313-23	0-100	IN.HgA	0.25%
5SE01313-24	0-400	IN.HgA	0.25%
5SE01313-25	0-300	PSIA	0.25%

Ordering Example: 5SE01313-6, 0 to 150 psig stainless steel pressure transducer, 0.25% accuracy with isolated 0 to 5 VDC output. Consult factory for price and delivery.

SPECIFICATIONS

Recommended Excitation: 28 VDC ±4 VDC

Rated Output (RO): 5 VDC ±0.25% (±10% Adjustable) Short Circuit Protected

Zero Balance (% RO): ±10% Adjustable (Min.)

Temperature Effect on Zero Balance (% RO): 0.0015/°F (0.0027%/°C) Max.

Temperature Effect on Output (% Reading): 0.0020/°F (0.0036/°C) Max.

Compensated Temperature Range: -25 to 150°F (-32 to 66°C) Min.

Safe Over Temperature Range: -65 to 250°F (-54 to 121°C) Min.

Overpressure Range (%RO): 5 psi: 300% RO Min.

10-5000 PSI: 150% RO Min.

Ultimate Overpressure Range (%RO) 5-200 psi: 800% RO Min.

350-2000 psi: 300% RO Min. (Diaphragm shall not rupture)

Combined Effects Non-Linearity, Hysteresis and Repeatability: 0.25% RO (Max.)

Vibration Limit (5-2000 Hz): 0.04% RO/G (Max.)

Thermal Zero Stability (%RO): 0.4% RO (Max.)

Thermal Sensitivity Stability (%RO): 0.3% RO (Max.)

1-800-872-3963SM
1-800-USA-DYNE

© COPYRIGHT 2004 OMEGADYNE INC. ALL RIGHTS RESERVED

OMEGADYNE
CEC Pressure Products
OMEGADYNE, INC: Cage - 09AL6

